SITE E

ROAD

PUBLIC PP-1 HANDED PP-2 HANDED No. OF

NOTE:

from WRD.

7. The applicant should abide by the rules and regulation of the WRD from time to time. The applicant should also abide court of law of both State & Central Government from time to time.

Waterbody at any cost.

10. WRD is giving opinion only in connection with the inundation aspect and does not deliver any rights to the applicant to encroach the WRD / Government Lands / river. The NOC for his site from the WRD is purely issued on the basis of inundation point of view 11. Regarding drainage network purely dealt with CMDA or local body who maintaining the Micro drains and whereas WRD is dealt with Macro drains only. Hence, the drainage network has to decided by the CMDA or applicant within the site. If the particular site is prone as vulnerable for high inundation, then WRD will suggest only peripheral drain size or otherwise, WRD suggestion is not forwarded necessary.


(IV) LOCAL BODY SHOULD ENSURE COMPLIANCE OF ALL THE CONDITIONS STIPULATED BY PWD IN THEIR LETTER NO.DB/T5(3)/F- NOC 002491 UDAYAVARKOIL 000584 / 2022 / DATED 08.02.2023, AND SHALL OBTAIN A LETTER FROM PWD CONFIRMING THE COMPLIANCE OF THE CONDITIONS BEFORE THE SANCTION AND RELEASE OF THE LAYOUT (V) THE APPLICANT IS RESPONSIBLE FOR THE SHAPE, SIZE & DIMENSIONS OF THE SITE UNDER REFERENCE.

In the second second

LLU.	
]
]
]
]

THIRUMAZHISAI TOWN PANCHAYAT LAYOUT OF HOUSE SITES IN S.Nos:240/2 OF UDAYAVARKOIL VILLAGE.

SCALE: 1:800 (ALL MEASUREMENTS ARE IN METRE.)

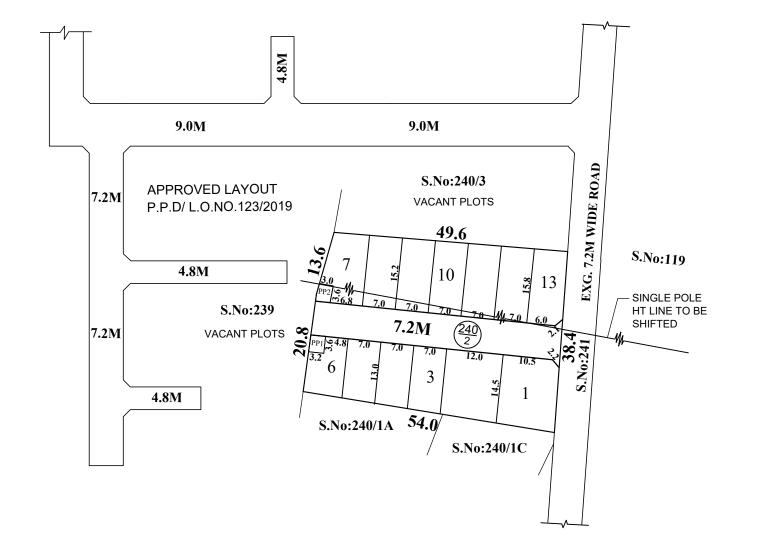

EXTENT (AS PER PATTA)	:	1900 SQ.M
AREA	:	382 SQ.M
C PURPOSE PROVIDED (1%)	•	23 SQ.M
D OVER TO THE LOCAL BODY (0.5%) = 11.0 Sq.m D OVER TO THE TANGEDCO (0.5%) = 12.0 Sq.m		
PLOTS	:	13 Nos.

1. SPLAY - 1.5M x 1.5M, 3.0M x 3.0M

2. MEASUREMENTS ARE INDICATED EXCLUDING SPLAY DIMENSIONS

3. C ROAD AREA **PUBLIC PURPOSE-1 (0.5%)** WERE HANDED OVER TO THE LOCAL BODY VIDE GIFT DEED DOC.NO:2330 /2023, DATED:20.04.2023 @ SRO,POONAMALLEE . (RESERVED FOR TANGEDCO)

CONDITIONS:

(I)THE APPLICANT SHOULD FOLLOW THE CONDITIONS MENTIONED BY THE CE, PWD/WRD, CHENNAI REGION, CHEPAUK, CHENNAI-5 IN LETTER NO.DB/T5(3)/F- NOC 002491 UDAYAVARKOIL 000584 / 2022 / DATED 08.02.2023, WHICH ARE TO BE COMPLIED BY THE APPLICANT BEFORE ISSUING OF THE LAYOUT APPROVAL BY THE COMPETENT AUTHORITY (LOCAL BODY)

1. The applicant's land should be filled with earth filling with proper compaction to the minimum Level of (+)25.350m (ie. 0.030m above Weir Crest level of Varatharajapuram Tank which is (+)25,320 m) to protect the site from inundation during floods. The process of earth filling and compaction should be done in layers of not more than 0.30 metre depth to achieve required degree of compaction for the depth from 1.010m to 1.060m depending upon the existing field levels. Also, the applicant should provide emergency

pumping operation for the seepage water, if it is proposed to have basement floor and as well as dewatering arrangements during flood periods. 2. The all round pavement level within the site should not be less than (+)25.350m The applicant should prepare the layout proposal by considering the suitable internal storm water drainage network drains within the site ie., micro drains of suitable size as per prevailing site

conditions at her own cost. The same should be connected to the local drain/channel, rainwater harvesting, roads with road side drains and sewerage treatment plant and its disposal and garbages/debris and other solid waste management as per norms in existence within the applicant's land according to existing rules in force and should get proper approval from competent authority without fail.

The sewage or any unhygienic drainage (Treated or Untreated) should not be let into Eri /channel/course at any cost and the debris and other materials should not be dumped into the drain /surplus course obstructing free flow of water. The applicant should make drainage network, at his own cost and the same is, to be connected to natural storm water drainage / channel. There should not be any hindrance to the free flow of internal drain to downstream.

3. Since, the site exists in close proximity with the Water Bodies, the necessary setback distance should be provided within the site as per the norms in existence and as per the rules in force of CMDA (as per the circular issued by the office of the Commissioner of Town & Country Planning, Chennai - 2 vide Roc No 4367 / 2019- BA2/ 13.03.2019) during development and no construction activities are to be executed in the setback area in future also. The CMDA should issue completion certificate only after obtaining compliance certificate NOC

4. The applicant should clearly demarcate the boundary of his land before commencement of any developmental activities in the presence of Revenue and WRD authorities.

5. The permission granted to the applicant, should not be altered/modified/ changed to any others: Based on the records submitted by the applicant, the permission will be cancelled without any correspondence. Hence, the applicant is solely responsible of genuinety of the documents submitted

6. The WRD officers should be allowed to inspect the site at any time, during execution and thereafter, if necessary. Advance intimation should be given to the WRD officers concerned before commencement of work.

8. The applicant should get clearance certificate for his site from the Revenue department to make sure that the site is not an encroached property from the water body as well as confirming this proposed site boundaries

9. The sewage water from the applicant's land should not let into the drain and for the disposal of the sewage water, suitable arrangements should be made for the same by the applicant, and as well as the construction materials/debris/garbages should not be dumped into the

At any cost, sewage/sullage should not be let into river, and the garbages debris and construction materials should not be dumped into the Waterbody restricting the free flow of water.

The owner of the document received from the applicant is purely of applicant's responsibility and it is only for reference purpose to this department. The legal validity of this document should be verified by the Development / Revenue authorities. The specific remarks on inundation are purely issued on technical grounds in respect to the physical location of land.

Failing to comply with any of the above conditions. WRD reserves rights to withdraw the Technical opinion on inundation point of view to the above proposed site and in event, the applicant shall not be eligible for any compensation whatsoever and as well as legal entity. (II) TNCDBR-2019 RULE NO: 47 (8) & AMENDMENTS APPROVED IN G.O.Ms.No.16, MAWS (MA1) DEPARTMENT DATED 31.1.2020 AND PUBLISHED IN TNGG ISSUE No.41 DATED:31.01.2020

ONE PERCENT OF LAYOUT AREA EXCLUDING ROAD, ADDITIONALLY, SHALL BE RESERVED FOR "PUBLIC PURPOSE". WITHIN THE ABOVE CEILING 0.5% OF AREA SHALL BE TRANSFERRED TO THE LOCAL BODY AND 0.5% OF AREA SHALL BE TRANSFERRED TO THE TANGEDCO OR TO THE LOCAL BODY FREE OF COST THROUGH A REGISTERED GIFT DEED BEFORE THE ACTUAL SANCTION OF THE LAYOUT. (III) TNCDBR-2019, RULE NO: 47 (11)

THE COST OF LAYING IMPROVEMENTS TO THE SYSTEMS IN RESPECT OF ROAD, WATER SUPPLY, SEWERAGE, DRAINAGE OR ELECTRIC POWER SUPPLY THAT MAY BE REQUIRED AS ASSESSED BY THE CONCERNED AUTHORITY, NAMELY, THE LOCAL BODY AND TAMIL NADU ELECTRICITY BOARD, SHALL BE BORNE BY THE APPLICANT.

LEGEND:

SITE BOUNDARY **ROADS GIFTED TO THE LOCAL BODY** EXISTING ROAD PUBLIC PURPOSE-1 GIFTED TO THE LOCAL BODY

PUBLIC PURPOSE-2 GIFTED TO THE TANGEDCO

This Planning Permission Issued under New Rule TNCDBR.2019 is subject to final outcome of the W.P(MD) No.8948 of 2019 and WMP (MD) Nos. 6912 & 6913 of 2019.

P.P.D **L.O** DATE

